




N.T.S.

IMPORTANT NOTICE

Section 4216/4217 of the Government Code requires a Dig Alert Identification Number to be issued before a "Permit to Excavate" will be valid. For your Dig Alert I.D. Number call CALL TOLL FREE 48 HOURS BEFORE YOU DIG NDERGROUND SERVICE ALERT 1-800-227-2600

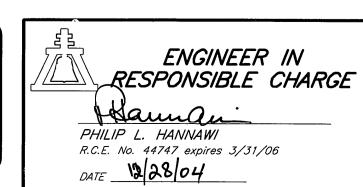



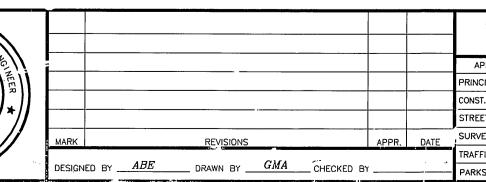

CITY OF RIVERSIDE, CALIFORNIA PUBLIC WORKS DEPARTMENT APPROVED BY

CITY ENGINEER CONST. CONTRACT ADMIN. STREET SERVICES SURVEYOR DATE R/28/04 \_\_\_\_ HORIZ. SCALE: 1" = 100' PARKS DEPARTMENT

MASSACHUSETTS AVE WHEELCHAIR RAMP CONSTRUCTION BETWEEN ATLANTA AVE AND DON GOODWIN DR

GENERAL CONSTRUCTION NOTES

1) PRIME CONTRACTORS BIDDING THIS WORK SHALL HAVE A CLASS A OR C-8 LICENSE.

2 CONFLICTING UTILITIES, IF ANY, WITHIN CONSTRUCTION AREA, SHALL BE RELOCATED PRIOR TO CONSTRUCTION.

3 TREES AND SHRUBS, AFFECTED BY THE PROPOSED SIDEWALK CONSTRUCTION, SHALL BE TRIMMED TO AT LEAST 8' VERTICALLY ABOVE THE SIDEWALK SURFACE AND TO AT LEAST 3' LATERALLY OF THE SIDEWALK, WHERE RIGHT-OF-WAY PERMITS.

SPECIFIC CONSTRUCTION NOTES

NUMBERS, ABOVE 100 IN A HEXAGON ON THE PLAN, REFER TO THE RESPECTIVE STANDARD OF DRAWING AND SHALL BE CONSTRUCTED ACCORDINGLY, UNLESS MODIFICATIONS ARE NOTED ON THE PLAN OR COVER SHEET. ANY NUMBER SHOWN BELOW THE STANDARD DEAWING NUMBER INDICATES THE SPECIFIC ALTERNATE TO BE CONSTRUCTED.

5 EXISTING SPRINKLERS AND IRRIGATION LINES, AFFECTED BY THE CONSTRUCTION OF THE PROPOSED SIDEWALK, SHALL BE MODIFIED AS NECESSARY TO MEET IRRIGATION REQUIREMENTS.

NEW PIPES AND SPRINKLER HEADS SHALL BE SAME OR EQUAL TO EXISTING AS APPROVED BY INSPECTOR.

4) ALL STREET PULL BOXES AFFECTED BY CONSTRUCTION, SHALL BE ADJUSTED TO THE PROPOSED SIDEWALK GRADE.

(304) CONSTRUCT WHEELCHAIR RAMP PER STD. DWG. 304.

220 REMOVE AND RECONSTRUCT CROSS GUTTER PER STD. DWG. 220.

G GRIND CURB FACE AT SIDEWALK TO O" HIGH.

ACCT. NO. 9220800611-440120XX R-3828 SHEET 1 OF 1 FILE:

INDEXED 1-12-05 4-11